

## PATENT ABSTRACTS OF JAPAN

(11)Publication number :

09-114479

(43)Date of publication of application : 02.05.1997

(51)Int.Cl.

G10K 15/12

H03H 17/00

H04S 1/00

(21)Application number : 07-273880

(71)Applicant : MATSUSHITA ELECTRIC IND CO LTD

(22)Date of filing : 23.10.1995

(72)Inventor : MATSUMOTO MASA HARU

TAMURA TADASHI


KATAYAMA TAKASHI

## (54) SOUND FIELD REPRODUCING DEVICE

## (57)Abstract:

PROBLEM TO BE SOLVED: To reproduce a sound field having a range equal to or wider than that in the conventional practice without impairing clarity of voice signals.

SOLUTION: Voice signals are eliminated from inputted stereo two channel signals in a voice signal eliminating circuit 12 and reflection sounds are added to the output signals in a reflection sound adding circuit 14 and the outputs of the circuit 14 are processed so that the sound field is expanded in a sound field expanding circuit 15. A voice extracting circuit 13 extracts voice signals from the inputted stereo two channel signals. An adding circuit 16 adds output signals of the sound field expanding circuit 15 and the voice extracting circuit 13 with a prescribed volume to output them to the outside with speakers 9, 10.

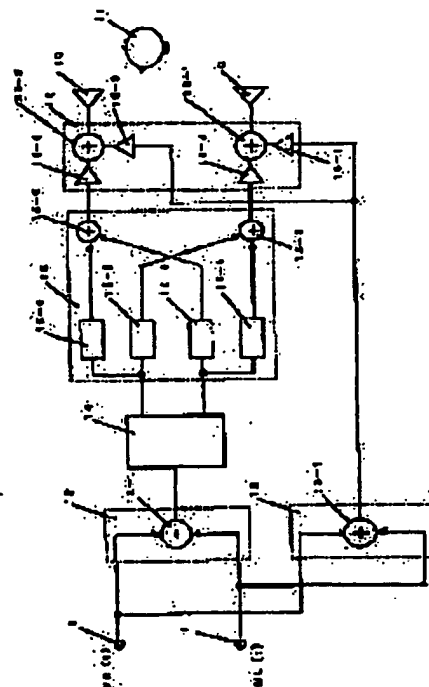

BEST AVAILABLE COPY

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

{Date of final disposal for application}

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C); 1998,2003 Japan Patent Office

**\* NOTICES \***

JPO and NCIP are not responsible for any

damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

**DETAILED DESCRIPTION**

---

[Detailed Description of the Invention]

[0001]

[Field of the Invention] This invention relates to the sound field regenerative apparatus which can perform sound reproduction with presence for example, in AV (audio-visual) device.

[0002]

[Description of the Prior Art] In order to enjoy a movie by the spread of VTRs in an image and the sound field at home in recent years, sound reproduction with a big screen and presence is desired, and not only a movie but in order to enjoy a music title, sound reproduction with presence is desired, and development of the hardware corresponding to this is needed.

[0003] Hereafter, it explains, referring to a drawing about the conventional sound field regenerative apparatus.

[0004] Drawing 13 is the hardware block diagram showing the configuration of the conventional sound field regenerative apparatus.

[0005] The input terminal into which 1 and 2 input a signal in drawing 13, the multiplier with which 3 hangs -1 on an input signal, The adder with which 4 adds an input signal, the delay machine to which 5 carries out time delay of the input signal, The adder with which 7 and 8 add an input signal, the multiplier with which 6 hangs -1 on an input signal, the loudspeaker to which 9 and 10 carry out sound reproduction of the signal outside, and 11 are the listening persons who met loudspeakers 9 and 10, and are ML (t) (t expresses continuous time amount and it expresses that ML (t) is a time function.). the following -- being the same -- as for the Lch signal of a stereo audio signal, and MR (t), the Rch signal of a stereo audio signal and tau 3 are the time delays in the delay machine 5.

[0006] About the conventional sound field regenerative apparatus constituted as mentioned above, the actuation is explained using drawing 13.

[0007] From an input terminal 1, ML (t) is inputted, from an input terminal 2, MR (t) is inputted, the inputted signal is divided into two, respectively, MR (t) is inputted into an adder 4 and an adder 8, and ML (t) is inputted into a multiplier 3 and an adder 4. In a multiplier 3, -1 is hung on ML (t), and, as a result, it is - ML (t) is inputted into an adder 4. In an adder 4, MR (t) and -ML(t) is added, MR(t)-ML(t) is outputted as the result, and it is inputted into the delay machine 5. Only time amount tau 3 delays MR(t)-ML(t) with the delay vessel 5, and MR(t-tau 3)-ML (t-tau 3) is outputted. As for the output signal of the delay machine 5, while branches to two, a signal is inputted into an adder 8, and another side is inputted into a multiplier 6. In a multiplier 6, -one is hung on MR(t-tau 3)-ML (t-tau 3), and - (MR(t-tau 3)-ML (t-tau 3)) which it is as a result is inputted into an adder 7. In an adder 8, addition of MR (t) and MR(t-tau 3)-ML (t-tau 3) is performed, and MR(t)+MR(t-tau

3)-ML (t-tau 3) which it is as a result is outputted from a loudspeaker 10. In an adder 7, ML (t) and - (MR(t-tau 3)-ML (t-tau 3)) are added, and ML(t)- (MR(t-tau 3)-ML (t-tau 3)) which it is as a result is outputted from a loudspeaker 9.

[0008] At this time, from one side of two loudspeakers to MR(t-tau 3)-ML (t-tau 3) A signal which is opposition mutually is mixed with an input signal, and it is reproduced. from another side, it is called - (MR(t-tau 3)-ML (t-tau 3)) -- Sound field which the normal position of an image does not understand by this are generated (or when the signal subtracted negates a cross talk component, it becomes the feeling which the right-and-left signal has become from the outside [ loudspeaker / each ].). . And sound field with a feeling of breadth or presence are generated by adjusting mix balance with ML (t) which is the direct sound to which no processing processings are carried out, and MR (t).

[0009]

[Problem(s) to be Solved by the Invention] However, with the above configurations, the mix balance of an opposition sound and direct sound will adjust size of effectiveness, and when there was little effectiveness when the opposition sound was small, and it enlarged [ sound / opposition ] so that effectiveness might be known, the technical problem that voice became not clear occurred.

[0010] The purpose of this invention is offering the sound field regenerative apparatus which a sound signal's can also be reproduced clearly and can make a listening person sense a feeling of breadth for coincidence in consideration of the above conventional technical problems.

[0011]

[Means for Solving the Problem] The voice and a non-voice signal acquisition means to acquire a sound signal and a non-voice signal from the sound signal into which the sound field regenerative apparatus of this invention was inputted, As opposed to the non-voice signal acquired by said voice and non-voice signal acquisition means It has a sound field processing means to perform predetermined processing for extending sound field, an addition means to add the output signal of said sound field processing means to the sound signal acquired by said voice and non-voice signal acquisition means, and an output means for outputting the output signal of said addition means.

[0012] According to this this invention, the natural breadth which can also reproduce a sound signal more clearly compared with the former, and has presence is reproducible.

[0013]

[Embodiment of the Invention] The voice and a non-voice signal acquisition means to acquire a sound signal and a non-voice signal from the sound signal into which invention of this invention according to claim 1 was inputted, As opposed to the non-voice signal acquired by said voice and non-voice signal acquisition means It is the sound field regenerative apparatus equipped with a sound field processing means to perform predetermined processing for extending sound field, an addition means to add the output signal of said sound field processing means to the sound signal acquired by said voice and non-voice signal acquisition means, and the output means for outputting the output signal of said addition means. As opposed to the non-voice signal from which the sound signal and the non-voice signal were acquired from the sound signal into which voice and a non-voice signal acquisition means were inputted in this invention, and the sound field processing means was acquired by said voice and non-voice signal acquisition means Predetermined processing for extending sound field is performed, the output signal of said sound field processing means is added to the sound signal from which the addition means was acquired by said voice and non-voice signal acquisition means, and an output means outputs the output signal of said addition means to it.

[0014] Invention of this invention according to claim 2 is a sound field regenerative

apparatus according to claim 1 which has the sound field expansion means which said sound field processing means can make the location of the arbitration of space able to orientate an image substantially using a sound effect addition means to add a reflected sound and/or a reverberation sound and to output to said non-voice signal, and its output signal, and can extend sound field. In this invention, a sound effect addition means can add and output a reflected sound and/or a reverberation sound to said non-voice signal, and a sound field expansion means can make the location of the arbitration of space able to orientate an image substantially using that output signal, and sound field can be extended.

[0015] An input means by which invention of this invention according to claim 3 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, It is the sound field regenerative apparatus equipped with a voice extract means to extract said sound signal from said signal, said sound field expansion means and an addition means to apply the output signal of said voice extract means with predetermined sound volume, and the two or more loudspeaker sections that emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound signal from the signal inputted into the input means. And an addition means inputs the output signal of a sound field expansion means and a voice extract means, and adds these signals with predetermined sound volume. And the output signal of an addition means is emitted to a listening person as a sound by two or more loudspeakers.

[0016] An input means by which invention of this invention according to claim 4 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, An amount measurement means of voice to measure the sound-volume ratio of the output signal of a voice extract means to extract said sound signal from said signal, and a said voice removal means and a voice extract means, with a predetermined time interval, It is the sound field regenerative apparatus equipped with an addition means to apply the output signal of said sound field expansion means and a voice extract means using the sound-volume ratio measured with said amount measurement means of voice, and two or more loudspeakers which emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound

signal from the signal inputted into the input means. And the amount measurement means of voice inputs the output signal of a voice removal means and a voice extract means, and asks for those sound-volume ratios with a predetermined time interval. An addition means inputs the output signal of a sound field expansion means and a voice extract means, and these signals are added with the sound volume corresponding to the sound-volume ratio called for with the amount measurement means of voice. And the output signal of an addition means is emitted to a listening person as a sound by two or more loudspeakers.

[0017] An input means by which invention of this invention according to claim 5 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, A voice extract means to extract said sound signal from said signal, and a variation measurement means to measure the time variation of the sound volume of the signal inputted into said input means with a predetermined time interval, It is the sound field regenerative apparatus equipped with an addition means to apply the output signal of said sound field expansion means and said voice extract means using the time variation of the sound volume measured with said variation measurement means, and two or more loudspeakers which emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound signal from the signal inputted into the input means. And a variation measurement means inputs the signal inputted into the input means, and variation whether a time change of the signal is sharp or loose is calculated with a predetermined time interval. An addition means inputs the output signal of a sound field expansion means and a voice extract means, and these signals are added with the sound volume corresponding to the variation calculated with the variation measurement means. And the output signal of an addition means is emitted to a listening person as a sound by two or more loudspeakers.

[0018] An input means by which invention of this invention according to claim 6 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, A voice extract means to extract said sound signal from said signal, and a variation measurement means to measure the time variation of the sound volume of the output signal of said voice removal means with a predetermined time interval, It is the sound field regenerative apparatus equipped with an addition means to apply the output signal of said sound field expansion means and said voice extract means using the time variation of the sound volume measured with said variation measurement means, and two or more loudspeakers which emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect

addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound signal from the signal inputted into the input means. And a variation measurement means inputs the output signal of a voice removal means, and variation whether a time change of the signal is sharp or loose is calculated with a predetermined time interval. An addition means inputs the output signal of a sound field expansion means and a voice extract means, and these signals are added with the sound volume corresponding to the variation calculated with the variation measurement means. And the output signal of an addition means is emitted to a listening person as a sound by two or more loudspeakers.

[0019] An input means by which invention of this invention according to claim 7 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, An amount measurement means of voice to measure the sound-volume ratio of the output signal of a voice extract means to extract said sound signal from said signal, and a said voice removal means and said voice extract means, with a predetermined time interval, A variation measurement means to measure the time variation of the sound volume of the signal inputted into said input means with a predetermined time interval, It is the sound field regenerative apparatus equipped with an addition means to apply the output signal of said sound field expansion means and said voice extract means using the amount measured with said amount measurement means of voice, and said variation measurement means, and two or more loudspeakers which emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound signal from the signal inputted into the input means. And the amount measurement means of voice inputs the output signal of a voice removal means and a voice extract means, and asks for those sound-volume ratios with a predetermined time interval. Moreover, a variation measurement means inputs the signal inputted into the input means, and variation whether a time change of the signal is sharp or loose is calculated with a predetermined time interval. An addition means inputs the output signal of a sound field expansion means and a voice extract means, and these signals are added with the amount of voice calculated by the amount measurement means of voice, and the sound volume corresponding to the variation calculated with the variation measurement means. And the output signal of an addition means is emitted to a viewer as a sound by two or more loudspeakers.

[0020] An input means by which invention of this invention according to claim 8 inputs a signal, and a voice removal means to remove a sound signal from said signal, A sound effect addition means to add a reflected sound and/or a reverberation sound to the output signal of said voice removal means, The sound field expansion means which the output signal of said sound effect addition means

can be considered as an input, and the location of the arbitration of space can be made to be able to orientate an image substantially, and can extend sound field, An amount measurement means of voice to measure the sound-volume ratio of the output signal of a voice extract means to extract said sound signal from said signal, and a said voice removal means and said voice extract means, with a predetermined time interval, A variation measurement means to measure the time variation of the sound volume of the output signal of said voice removal means with a predetermined time interval, It is the sound field regenerative apparatus equipped with an addition means to apply the output signal of said sound field expansion means and said voice extract means using the amount measured with said amount measurement means of voice, and said variation measurement means, and two or more loudspeakers which emit the output signal of said addition means as a sound. In this invention, a voice removal means removes a sound signal from the signal inputted into the input means. And a sound effect addition means will add a reflected sound and a reverberation sound to this signal, if the output signal of a voice removal means is inputted. Next, a sound field expansion means will carry out processing which gives a listening person right and left or the feeling which spread up and down to this signal, if the output signal of a sound effect addition means is inputted. A voice extract means extracts a sound signal from the signal inputted into the input means. And the amount measurement means of voice inputs the output signal of a voice removal means and a voice extract means, and asks for those sound-volume ratios with a predetermined time interval. Moreover, a variation measurement means inputs the output signal of a voice removal means, and variation whether a time change of the signal is sharp or loose is calculated with a predetermined time interval. An addition means inputs the output signal of a sound field expansion means and a voice extract means, and these signals are added with the amount of voice calculated by the amount measurement means of voice, and the sound volume corresponding to the variation calculated with the variation measurement means. And the output signal of an addition means is emitted to a viewer as a sound by two or more loudspeakers.

[0021] Invention of this invention according to claim 9 is a sound field regenerative apparatus given in any 1 of claim 3 to claims 8 to which only predetermined time amount delays the output signal of said voice extract means, and, as for said addition means, adds it.

[0022] The signal with which invention of this invention according to claim 10 is added as an output signal of said voice extract means in said addition means is a sound field regenerative apparatus given in any 1 of claim 3 to claims 8 which are a monophonic recording.

[0023] Hereafter, the gestalt of operation of this invention is explained using drawing.

[0024] Drawing 1 is the block diagram showing the configuration of the sound field regenerative apparatus which is one gestalt of operation concerning this invention. The configuration of one gestalt of this operation is explained as the 1st example, referring to this drawing.

[0025] In addition, the part which has the same function as the conventional example attaches the same sign, and omits detailed explanation.

[0026] In drawing 1, the signal ML of Lch (t) inputted into the input terminal 1 and the signal MR of Rch (t) inputted into the input terminal 2 branch to two, respectively, one signal is given to the voice removal circuit 12, and the signal of another side is inputted into the voice extract circuit 13. The voice and the non-voice signal acquisition means of this invention include the voice removal circuit 12 and the voice extract circuit 13.

[0027] The voice removal circuit 12 consists of subtractors 12-1 which search for the



difference of two inputted signals, and the output is given to the reflected-sound addition circuit 14 which adds a reflected sound to an input signal. The output signal of the reflected-sound addition circuit 14 is inputted into the sound field expansion circuit 15. The sound field expansion circuit 15 consists of the FIR filter 15-1, 15-2, 15-3, 15-4, an adder 15-5 adding an input signal, and 15-6. Here, the sound field processing means of this invention is a means including the reflected-sound addition circuit 14 and the sound field expansion circuit 15.

[0028] The voice extract circuit 13 consists of adders 13-1 adding two inputted signals, and the output signal of this branches to two and is inputted into an adder circuit 16. Moreover, two output signals of a sound field expansion circuit are also inputted into an adder circuit 16. The adder circuit 16 consists of a multiplier 16-1, 16-2, 16-3, 16-4, and an adder 33-1 and 33-2, in order to add the signal inputted at a predetermined rate.

[0029] Two output signals of an adder circuit 16 are emitted to the listening person 11 by loudspeakers 9 and 10, respectively.

[0030] The FIR filter 15-3 and 15-4 are the FIR filters which have an impulse response which an image orientates by FIR filtering to the listening person's 11 method of right-hand side or method of the right rear, and the FIR filter 15-1 and 15-2 are FIR filters which have an impulse response which is collapsed and an image orientates by the operation to the listening person's 11 method of left-hand side or method of the left rear.

[0031] That is, the FIR filter 15-4 has an impulse response  $h_{RR}(t)$ , the FIR filter 15-3 has an impulse response  $h_{RL}(t)$ , the FIR filter 15-2 has an impulse response  $h_{LR}(t)$ , and the FIR filter 15-1 has the impulse response  $h_{LL}(t)$ .

[0032] In addition, although not shown by a diagram, the power amplifier which amplifies the power of a signal minds the signal outputted to loudspeakers 9 and 10, and it is outputted to loudspeakers 9 and 10.

[0033] Thus, actuation of the sound field regenerative apparatus in the 1st constituted example is explained.

[0034] First, acoustic signals, such as voice and music, are inputted from input terminals 1 and 2, it branches to two, respectively, one signal is inputted into the voice removal circuit 12, and the signal of another side is inputted into the voice extract circuit 13. In the voice removal circuit 12, the difference of the inputted signal is searched for with a subtractor 12-1, and it is inputted into the reflected-sound addition circuit 14.

[0035] The sound signal of the singer who orientates in the center at the time of the music signal accompanied by [ signal / which is searched for in the voice removal circuit 12 / difference ] a singer in an input signal is offset, and serves as a reverberation component of Lch and Rch inserted at the time of sound recording or broadcast. For this reason, a sound signal is removable from a stereo 2ch signal. Moreover, conversely, in order to ask for the sum of the inputted signal with an adder 13-1, voice is emphasized in the voice extract circuit 13.

[0036] Drawing 2 (a) and (b) show typically the reflected-sound sequence added in the reflected-sound addition circuit 14, and, as for the axis of abscissa, the axis of ordinate shows the amplitude by time amount. For example, it is the reflected-sound sequence added since the reflected-sound sequence and drawing 2 (b) which are added since drawing 2 (a) outputs to the Rch side output to the Lch side. These reflected sounds are called for by the measurement in an actual hole, and the simulation using a sound ray method etc.

[0037] Drawing 3 (a) and (b) are drawings explaining the reflected-sound addition circuit 14 which actually adds this reflected sound. The delay machine with which only the time amount 17 was shown by the input terminal and 18 was indicated to be by tau ( $\tau$  is the same as that of a suffix and the following) is delayed in drawing 3

(a), the multiplier (it calls a tap) which performs the multiplication of the value which 19 calls the tap multiplier shown by  $X(i)$ , and the signal outputted from each delay machine the adder which take total of the signal with which 20 be outputted from each tap, and 21 are output terminals. To this display perform the notation in the case of using a digital signal and treat an analog signal, before being inputted into this reflected-sound addition circuit 14, conversion to the digital signal by the A/D converter is required (setting in one gestalt of this operation it is the same as that of the following digital from an analog which this A/D converter omits and is shown also in the part to be changed). Thus, the reflected-sound addition circuit 14 consists of FIR filters, it is constituted by the delay machine 18 and the tap 19, and, in the case of drawing 3 (a), a reflected-sound sequence as shown in drawing 3 (b) is acquired. On the contrary, what is necessary is just to set each amplitude  $X(i)$  and time delay  $\tau_i$  as the tap and delay machine of drawing 3 (a) to set up a reflected sound as shown in drawing 2 (a) and (b). This is constituted by DRAM (die NAMMIKKU random access memory), DSP (digital signal processor), etc. in fact.

[0038] Like this example, when the input to the reflected-sound addition circuit 14 stereo-izes an output signal by one piece (to two signals), two circuits (FIR filter) shown by drawing 3 (a) are used, and the tap multiplier set as this sets up the thing of a different value.

[0039] Two signals with which the reflected sound was added in the reflected-sound addition circuit 14 are inputted into the sound field expansion circuit 15.

[0040] In the sound field expansion circuit 15, the signal outputted to the R side is inputted into the FIR filter 15-3 and 15-4, and the signal outputted to the L side is inputted into the FIR filter 15-1 and 15-2. In the FIR filter 15-1 and 15-2, the inputted signal collapses so that an image may orientate to the method of left-hand side [ loudspeaker / 9 ], or a listening person's method of the left rear, and an operation is performed.

[0041] Here, how to make an image orientate in the direction of arbitration virtually is explained using drawing 4. Drawing 4 is a principle Fig. which generates virtually the image normal position equivalent to the case where a signal is reproduced, from the loudspeaker 25 prepared in the listening person's 11 method of left-hand side using the loudspeaker 9 of a left channel, and the loudspeaker 10 of a right channel. In this Fig., loudspeakers 9 and 10 are arranged ahead [ of the listening person 11 / right-and-left ]. And input signal  $S(t)$  22 are inputted into the FIR filters 23 and 24. The FIR filters 23 and 24 collapse an input signal by the impulse response  $h_{LR}(t)$  set up as a tap multiplier, respectively, and  $h_{LL}(t)$ , and perform an operation.  $h_1(t)$  shown by a diagram is an impulse response in the location (it is the location of the eardrum correctly, and when measuring, it considers as the location of an auditory-meatus inlet port) of the left ear of a loudspeaker 9 and the listening person 11. An impulse response [ in / similarly / in  $h_2(t)$  / the location of the right ear of a loudspeaker 9 and the listening person 11 ]; An impulse response [ in / in  $h_3(t)$  / the location of the left ear of a loudspeaker 10 and the listening person 11 ], An impulse response [ in / in  $h_4(t)$  / the location of the right ear of a loudspeaker 10 and the listening person 11 ], an impulse response [ in / in  $h_5(t)$  / the location of the left ear of a loudspeaker 25 and the listening person 11 ], and  $h_6(t)$  are the impulse responses in the location of the right ear of a loudspeaker 25 and the listening person 11.

[0042] In such a configuration, when signal  $S(t)$  is outputted from a loudspeaker 25, the sound which reaches the listening person's 11 lug is as follows.

[0043] That is, sound pressure  $L(t)$  in a left ear is expressed with (1) type.

[0044]  $L(t) = S(t) * h_5(t) \dots (1)$

Sound pressure  $R(t)$  in a right ear is expressed with (2) types.

[0045]  $R(t) = S(t) * h_6(t) \dots (2)$

However, \* collapses and expresses the operation.

[0046] Moreover, in practice, although the own transfer function of a loudspeaker etc. will be multiplied, this decides to ignore and may think that transfer functions, such as a loudspeaker, are contained.

[0047] Moreover, time amount considers sound pressure [ of (1) and (2) types ], impulse response, and signal S (t) as a discrete digital signal, and it is changed like (3), (4), (5), (6), and (7) types, respectively.

[0048]

$L(t) \rightarrow L(n) \dots (3)$

$R(t) \rightarrow R(n) \dots (4)$

$h_5(t) \rightarrow h_5(n) \dots (5)$

$h_6(t) \rightarrow h_6(n) \dots (6)$

$S(t) \rightarrow S(n) \dots (7)$

In this case, (1) and (2) types become as shown in the following (several 1) and (several 2).

[0049]

[Equation 1]

$$L(n) = S(n) * h_5(n) = \sum_{k=0}^{n-1} S(k) \cdot h_5(n-k) \dots (8)$$

[0050]

[Equation 2]

[0051] Here, the natural number n should be written by nT in practice, although T expresses the sampling time, generally omits T and writes it like (8) and (9) types.

[0052] Moreover, similarly, signal S (t) is emitted from loudspeakers 9 and 10, and (following 10) and following (11) types are materialized about the sound which reaches the listening person 11. That is, the sound pressure of a left ear serves as the following (10) types.

[0053]

$L'(n) = S(n) * h_{LL}(n) * h_1(n) + S(n) * h_{LR}(n) * h_3(n) \dots (10)$

The sound pressure of a right ear serves as the following (11) types.

[0054]

$R'(n) = S(n) * h_{LL}(n) * h_2(n) + S(n) * h_{LR}(n) * h_4(n) \dots (11)$

a premise [ say / that a sound can be heard from said if a head transfer function is equal ] -- carrying out (this premise being the right generally) -- the following (12) - (15) type is materialized.

[0055]

$L(n) = L'(n) \dots (12)$

$h_5(n) = h_{LL}(n) * h_1(n) + h_{LR}(n) * h_3(n) \dots (13)$

$R(n) = R'(n) \dots (14)$

$h_6(n) = h_{LL}(n) * h_2(n) + h_{LR}(n) * h_4(n) \dots (15)$  Therefore, what is necessary is just to determine an impulse response  $h_{LL}(n)$  and  $h_{LR}(n)$  so that (13) and (15) types may be materialized.

[0056] for example, an impulse response  $h_1(t) - h_6(t)$  and  $h_{LL}(t) - h_{LR}(t)$  is rewritten with the expression of a frequency domain, it will become like following (16) - (23).

[0057]

$H_1(n) = \text{FFT}(h_1(n)) \dots (16)$

$H_2(n) = \text{FFT}(h_2(n)) \dots (17)$

$H_3(n) = \text{FFT}(h_3(n)) \dots (18)$

$H_4(n) = \text{FFT}(h_4(n)) \dots (19)$

$H5(n) = \text{FFT}(h5(n)) \dots (20)$

$H6(n) = \text{FFT}(h6(n)) \dots (21)$

$HLL(n) = \text{FFT}(hLL(n)) \dots (22)$

$HLR(n) = \text{FFT}(hLR(n)) \dots (23)$

However,  $\text{FFT}()$  expresses the function by which the Fourier transform (FFT) was carried out.

[0058] Next, if (13) and (15) types are rewritten with the expression of a frequency domain, it collapses like (24) shown below and (25) types, and an operation will change to multiplication and the rest will become the transfer function which carried out the Fourier transform of each impulse response.

[0059]

$H5(n) = HLL(n) \text{ and } H1(n) + HLR(n) \text{ and } H3(n) \dots (24)$

$H6(n) = HLL(n) \text{ and } H2(n) + HLR(n) \text{ and } H4(n) \dots (25)$

In (24) and (25) types, except a transfer function  $HLL(n)$  and the value of  $HLR(n)$ , since it is obtained by measurement, a transfer function  $HLL(n)$  and  $HLR(n)$  can be calculated like (26) and (27) types which are shown below.

[0060]

[Equation 3]

[0061]

[Equation 4]

[0062] Thus, determined  $HLL(n)$ ,  $hLL$  which carried out the inverse Fourier transform (IFFT) of the  $HLR(n)$  (n), the signal which gives signal  $S(n)$  to the FIR filters 23 and 24, and is outputted from a loudspeaker 9 using  $hLR(n)$  --  $hLL(n)$   $hLR(n)$  is collapsed in the signal outputted from a loudspeaker 10, and even if the listening person 11 does not actually sound the loudspeaker 25 of the method of left-hand side by emitting the signal, it can be sensed that the sound is sounding from the direction. In drawing 4, although the direction of a loudspeaker 25 was made into the method of left-hand side, the location of this loudspeaker is realizable by the same view not only depending on this but the method of right-hand side.

[0063] Therefore, it becomes possible by using the above approaches to extend the sound field which an image can be made to orientate in the direction of arbitration (for the same to be said of upper and lower sides) virtually, and are reproduced rather than the time of the usual loudspeaker playback.

[0064] The fundamental configuration of the FIR filter which performs a reefing operation is shown in drawing 5. In this Fig., the input terminal into which 26 inputs a signal, the delay element from which only  $\tau$  delays a signal as for 27, the value which 28 calls the tap multiplier shown by  $h(n)$  and the multiplier which performs the multiplication of an input signal, the adder with which 29 adds an input signal, and 30 are output terminals which output a signal. Usually, DSP (Digital Signal processor) and Dedicated LSI to which such an FIR filter performs \*\*\*\*\* at a high speed are used.

[0065] Impulse response  $h(n)$  and the (die length of the impulse response which  $n:0$  to  $N-1$  and  $N$  need) are set to a multiplier 28 as a tap multiplier like drawing 5. Moreover, the time delay corresponding to the sampling frequency at the time of changing an analog signal into a digital signal is set to a delay element 27. And a

reefing operation as shown by (8) and (9) formulas is performed by repeating \*\*\*\*\* and delay to the signal inputted into an input terminal 26, respectively. since signal processing is performed in the case of a digital signal, this is omitted by a diagram, although the D/A converter which changes a digital signal into an analog signal is required for the A/D converter which changes an analog signal into a digital signal in front of this FIR filter, and back in practice (the following -- the same).

[0066] A loudspeaker is virtually created for an image by the FIR filter 15-1 and 15-2 as mentioned above to the method of left-hand side, or the method of the left rear, and sound field are expanded.

[0067] Similarly, in the FIR filter 15-3 and 15-4, the inputted signal collapses so that an image may orientate to the method of right-hand side, or the method of the right rear, and an operation is performed.

[0068] The output signal of an adder 15-5, the FIR filter 15-2, and the FIR filter 15-4 is inputted into an adder 15-6, and the output signal of the FIR filter 15-1 and the FIR filter 15-3 is added.

[0069] The output signal of the voice extract circuit 13 and the sound field expansion circuit 15 is inputted into an adder circuit 16, and is added at a predetermined rate. An adder circuit 16 adds the signal inputted, respectively through a multiplier 16-1, 16-2, 16-3, 16-4 and an adder 33-1, and 33-2.

[0070] And sound reproduction of the two output signals of an adder circuit 16 is carried out from loudspeakers 9 and 10. In addition, although the configuration of an FIR filter showed the reflected-sound addition circuit 14, it is possible to generate a more natural sound effect by making the reverberation addition circuit for example, not only using this configuration but an all pass filter the configuration added to this (following, the same).

[0071] Next, it explains, referring to drawing 6 about the sound field regenerative apparatus as the 2nd example of one gestalt of operation concerning this invention. Drawing 6 is the block diagram showing the configuration of the sound field regenerative apparatus in the 2nd example. The part which has the same function as the 1st example attaches the same sign, and explanation is omitted. In drawing 6, as for the signal ML (t) inputted into input terminals 1 and 2, and MR (t), a sound signal is extracted in the voice extract circuit 13-2. The adder 13-1 adding two signals into which this voice extract circuit 13-2 was inputted, The band-pass filter 13-3 which passes only the voice grade (for example, 100Hz - 3kHz) of a signal (BPF), The multiplier 13-5 which multiplies the output signal of a band-pass filter by the predetermined multiplier, It is constituted by the signal inputted into input terminals 1 and 2 by the multiplier 13-6 which applies a predetermined multiplier at each, 13-4, a multiplier 13-5 and a multiplier 13-6, the adder 13-8 adding the output signal of 13-7, and 13-7.

[0072] Thus, only a voice extract circuit 13-2 which is different from the 1st example about actuation of the sound field regenerative apparatus in the 2nd constituted example is explained.

[0073] The voice extract circuit 13-2 inputs the signal inputted into input terminals 1 and 2, and adds these signals with an adder 13-1. The output signal of an adder 13-1 is inputted into a band-pass filter 13-3, and only the signal of voice grade is extracted. And the output signal of a band-pass filter 13-3 is adjusted to predetermined sound volume by the multiplier 13-5, and branches to two signals. Moreover, two inputted signals are adjusted to predetermined sound volume by a multiplier 13-4 and 13-6, respectively, and are added by an adder 13-7 and 13-8 with the output signal of a multiplier 13-5. An adder 13-7 and the output signal of 13-8 are inputted into an adder circuit 16, are predetermined sound volume in an adder circuit 16, and are added with the output signal of the sound field expansion circuit 15.

[0074] In addition, future actuation is the same as that of the 1st example.

[0075] Next, it explains, referring to drawing 7 about the sound field regenerative apparatus as the 3rd example of one gestalt of operation concerning this invention. Drawing 7 is the block diagram showing the configuration of the sound field regenerative apparatus in the 3rd example. The part which has the same function as the 1st example attaches the same sign, and explanation is omitted.

[0076] In drawing 7, a delay circuit 34 is a circuit which the output signal of the voice extract circuit 13 is inputted [ circuit ], and delays only predetermined time amount. Thus, only a part which is different from the 1st example about actuation of the sound field regenerative apparatus in the 3rd constituted example is explained.

[0077] The output signal of the voice extract circuit 13 is inputted into a delay circuit 34, and only predetermined time amount is delayed. This adjusts the time difference with the output signal from the sound field expansion circuit 16 to produce.

[0078] In addition, future actuation is the same as that of the 1st example.

[0079] Next, it explains, referring to a drawing about the sound field regenerative apparatus in the 4th example of one gestalt of operation concerning this invention. Drawing 8 is the block diagram showing the configuration of the sound field regenerative apparatus in the 4th example. In addition, the part which has the same function as the 1st example attaches the same sign, and omits detailed explanation.

[0080] In drawing 8, the output signal of the voice removal circuit 12 and the output signal of the voice extract circuit 13 are inputted into the amount measurement circuit 31 of voice, and the output signal of the amount measurement circuit 31 of voice is inputted into an adder circuit 16-5. Thus, only a part which is different from the 1st example about actuation of the sound field regenerative apparatus in the 4th constituted example is explained.

[0081] The amount measurement circuit 31 of voice inputs the output signal of the voice removal circuit 12 and the voice extract circuit 13, and as shown in a formula (28), it measures the ratio (sound-volume ratio) of the integral value in the predetermined time interval of those signals. This measurement is performed continuously.

[0082] Sound-volume ratio = output dt of the output dt/integral voice extract circuit of integral voice removal circuit ... (28) and this sound-volume ratio are outputted to an adder circuit 16-5. An adder circuit 16-5 adds the output signal of the sound field expansion circuit 15 and the voice extract circuit 13 which the value of a multiplier 16-6, 16-7, 16-8, and 16-9 is changed, and is inputted corresponding to the inputted sound-volume ratio. For example, when a sound-volume ratio is large, it is large in a multiplier 16-7 and the multiplier of 16-9, and a multiplier 16-6 and the multiplier of 16-8 are made small (when the output signal of the voice removal circuit 12 is larger than the output signal of the voice extract circuit 13). It becomes possible by doing in this way to attach MERIHARI of effectiveness. This reverse is performed when a sound-volume ratio becomes small.

[0083] In addition, adjustment of the multiplier of the multiplier 16-6 in the adder circuit 16-5 by this sound-volume ratio, 16-7, 16-8, and 16-9 may be changed for the purpose of effectiveness. That is, when a sound-volume ratio is large, in a multiplier 16-7 and the multiplier of 16-9, it is small and enlarging a multiplier 16-6 and the multiplier of 16-8 etc. is considered.

[0084] In addition, future actuation is the same as that of the 1st example.

[0085] Next, it explains, referring to a drawing about the sound field regenerative apparatus as the 5th example of one gestalt of operation concerning this invention. Drawing 9 is the block diagram showing the configuration of the sound field regenerative apparatus in the 5th example. In addition, the part which has the same function as the 1st example attaches the same sign, and omits detailed explanation.

[0086] In drawing 9, the signal inputted into input terminals 1 and 2 is inputted into

the variation measurement circuit 32. This variation measurement circuit 32 is constituted by the adder 32-1 adding the inputted signal, and the differentiator 32-2 which differentiates the signal within predetermined time amount. Thus, only a different part from the 1st example is explained about actuation of the sound field regenerative apparatus in the 5th constituted example.

[0087] The variation measurement circuit 32 adds the inputted signal with an adder 32-1, and differentiates the output signal of an adder 32-1 in a differentiator 32-2 with a predetermined time interval. And this processing is performed continuously and a differential result is outputted to an adder circuit 16-5. An adder circuit 16-5 changes the multiplier value of an adder 16-6, 16-7, 16-8, and 16-9 corresponding to the differential result inputted, and adds each output value. For example, when a differential result is large, a multiplier 16-7 and the multiplier of 16-9 are made small, and a multiplier 16-6 and the multiplier of 16-8 are enlarged. By doing in this way, it is possible to decrease the unnatural feeling of the reflected sound added in the sound effect addition circuit 14.

[0088] In addition, adjustment of the multiplier of the multiplier 16-6 in the adder circuit 16-5 by this differential result, 16-7, 16-8, and 16-9 may be changed for the purpose of effectiveness. That is, when a differential result is large, in a multiplier 16-7 and the multiplier of 16-9, it is small and the approach of not adjusting a multiplier 16-6 and the multiplier of 16-8 is also considered.

[0089] Next, it explains, referring to a drawing about the sound field regenerative apparatus as the 6th example of one gestalt of operation concerning this invention. Drawing 10 is the block diagram showing the configuration of the sound field regenerative apparatus in the 6th example. In addition, the part which has the same function as the 1st and 4th example etc. attaches the same sign, and omits detailed explanation.

[0090] The output signal of the amount measurement circuit 31 of voice and the variation measurement circuit 32 is inputted into an adder circuit 16-5. An adder circuit 16-5 changes the multiplier value of a multiplier 16-6, 16-7, 16-8, and 16-9 corresponding to these two inputted values.

[0091] In addition, adjustment of the multiplier of the multiplier 16-6 in an adder circuit 16-5, 16-7, 16-8, and 16-9 may be changed for the purpose of effectiveness.

[0092] Next, it explains, referring to a drawing about the sound field regenerative apparatus as the 7th example of one gestalt of operation concerning this invention. Drawing 11 is the block diagram showing the configuration of the sound field regenerative apparatus in the 7th example. In addition, the part which has the same function as the 1st example attaches the same sign, and omits detailed explanation.

[0093] In drawing 11, the output signal of the voice removal circuit 12 is outputted to the variation measurement circuit 32-3, and the output signal of the variation measurement circuit 32-3 is outputted to an adder circuit 16-5.

[0094] Thus, only a part which is different from the 1st example about actuation of the sound field regenerative apparatus in the 7th constituted example is explained.

[0095] The variation measurement circuit 32-3 differentiates the inputted signal with a predetermined time interval. And this processing is performed continuously and a differential result is outputted to an adder circuit 16-5. An adder circuit 16-5 changes the multiplier value of an adder 16-6, 16-7, 16-8, and 16-9 corresponding to the differential result inputted, and adds each output value. For example, when a differential result is large, a multiplier 16-7 and the multiplier of 16-9 are made small, and a multiplier 16-6 and the multiplier of 16-8 are enlarged. By doing in this way, it is possible to decrease the unnatural feeling of the reflected sound added in the sound effect addition circuit 14.

[0096] In addition, adjustment of the multiplier of the multiplier 16-6 in the adder circuit 16-5 by this differential result, 16-7, 16-8, and 16-9 may be changed for the

purpose of effectiveness. That is, when a differential result is large, in a multiplier 16-7 and the multiplier of 16-9, it is small and the approach of not adjusting a multiplier 16-6 and the multiplier of 16-8 is also considered.

[0097] Next, it explains, referring to a drawing about the sound field regenerative apparatus as the 8th example of one gestalt of operation concerning this invention.

Drawing 12 is the block diagram showing the configuration of the sound field regenerative apparatus in the 8th example. In addition, detailed explanation of the part which has the same function as the 1st and 7th example etc. is omitted.

[0098] The output signal of the amount measurement circuit 31 of voice and the variation measurement circuit 32-3 is inputted into an adder circuit 16-5. An adder circuit 16-5 changes the multiplier value of a multiplier 16-6, 16-7, 16-8, and 16-9 corresponding to these two inputted values.

[0099] In addition, adjustment of the multiplier of the multiplier 16-6 in an adder circuit 16-5, 16-7, 16-8, and 16-9 may be changed for the purpose of effectiveness.

[0100] Moreover, the voice removal circuit 12 may be constituted using the band limit filter which does not pass voice grade (for example, 100Hz - 3kHz), for example, although voice was removed from the difference of a stereo 2ch signal.

[0101] According to the above sound field regenerative apparatus, a sound signal is also clearly reproducible, and moreover, though it is an easy system configuration, natural breadth with presence is reproducible.

[0102] In addition, each example of the gestalt of the above operation is realized using IC discrete in practice etc. and DSP (Digital signal processor).

[0103] Moreover, although both the sound field processing means of this invention explained the case where a reflected-sound addition circuit and a sound field expansion circuit were included, they may be constituted from a gestalt of the above-mentioned implementation by not only this but one of circuits. Even if there is no sound field expansion circuit, a sound signal can be reproduced clearly and, moreover, presence can be obtained.

[0104]

[Effect of the Invention] It has the advantage in which the natural breadth which this invention can also reproduce a sound signal more clearly compared with the former so that clearly from the place described above, and has presence is reproducible.

---

[Translation done.]

#### NOTICES \*

JPO and NCIP are not responsible for any

damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.

2. \*\*\*\* shows the word which can not be translated.

3. In the drawings, any words are not translated.

---

#### DRAWINGS

---



JP 09-114474



## \* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.


1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

## DRAWINGS


[Drawing 2]

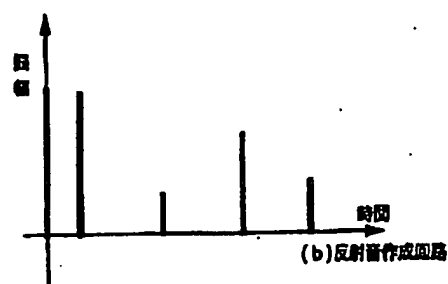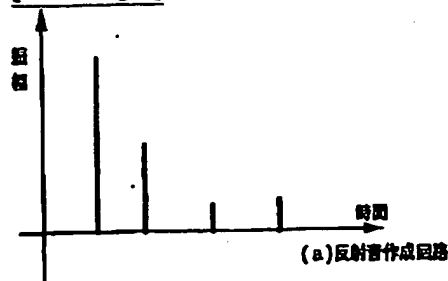


[Drawing 4]

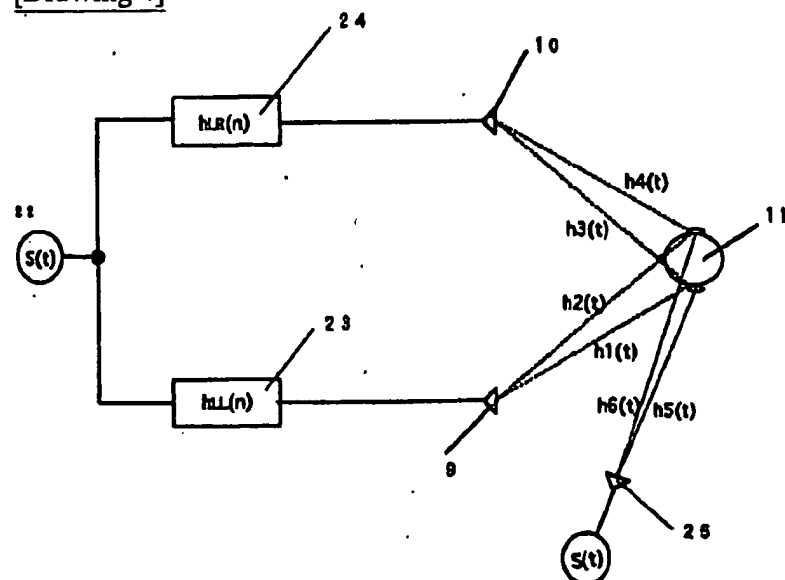


[Drawing 1]

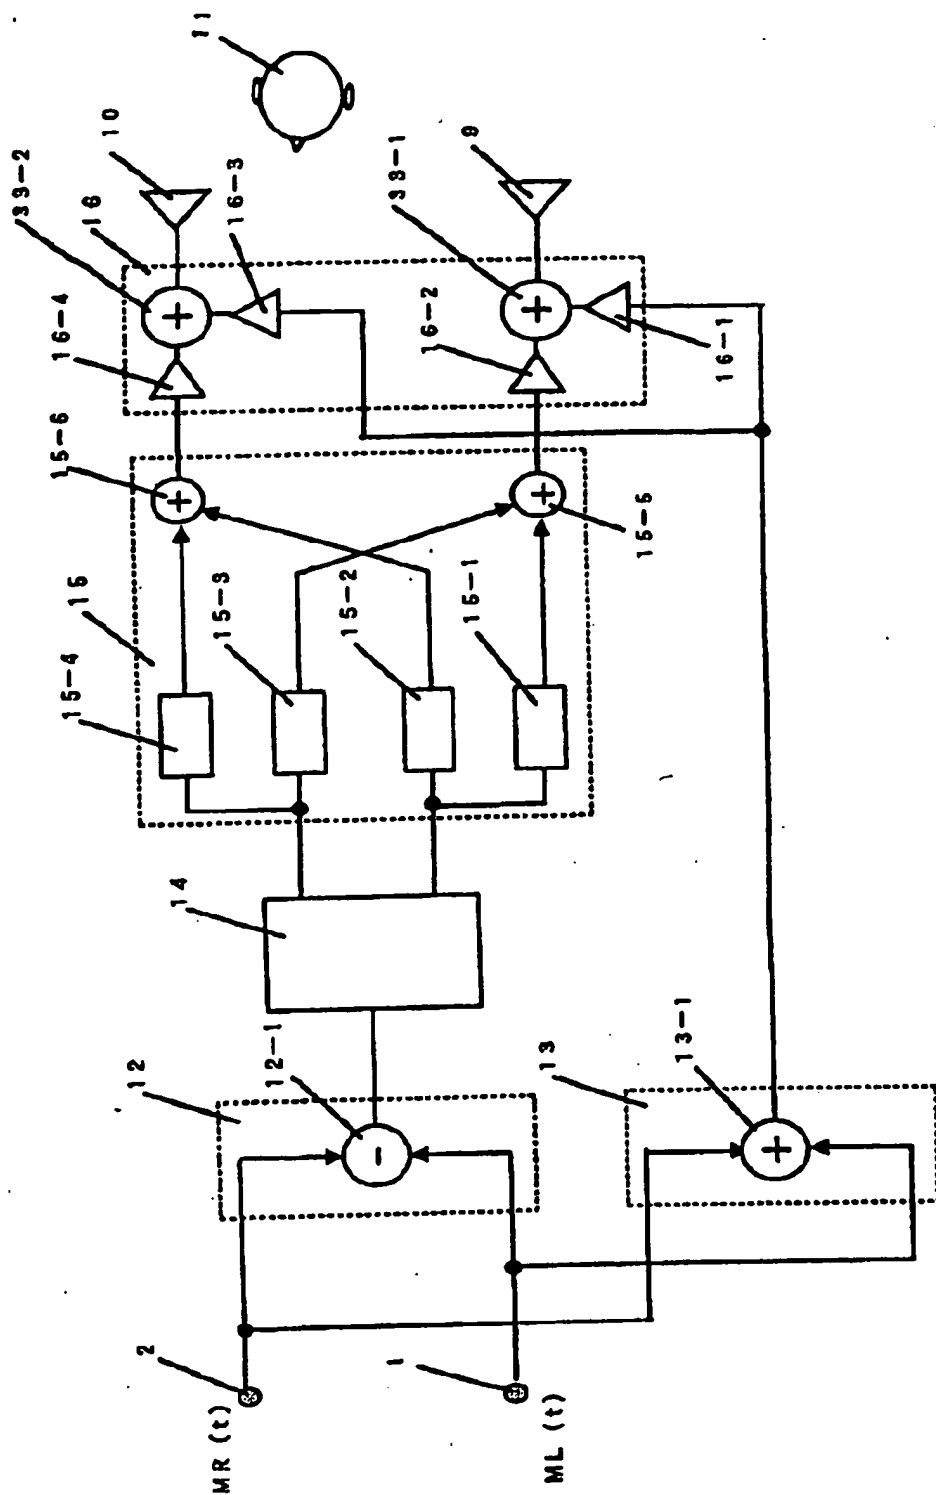


[Drawing 3]

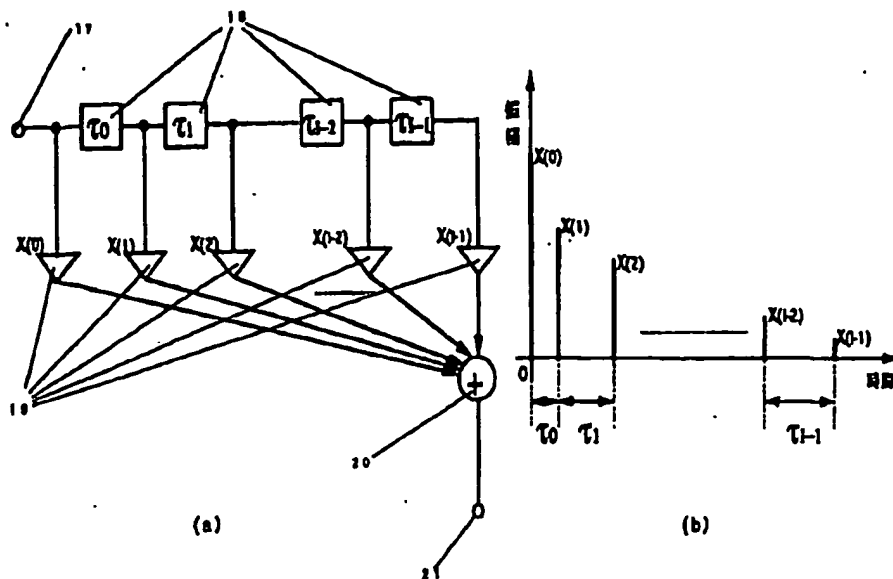


[Drawing 5]

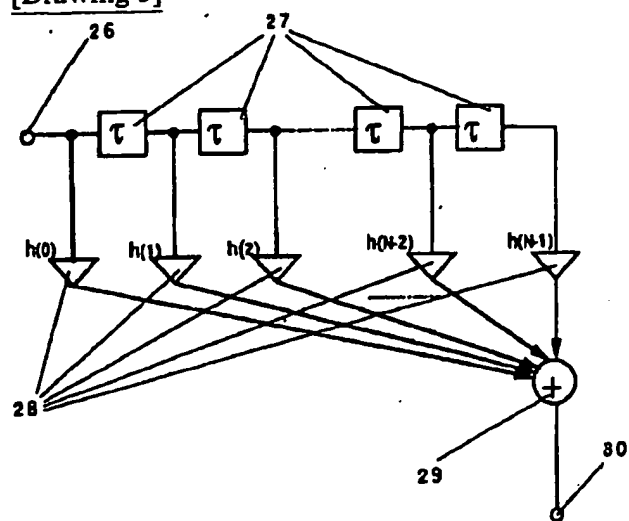


[Drawing 6]

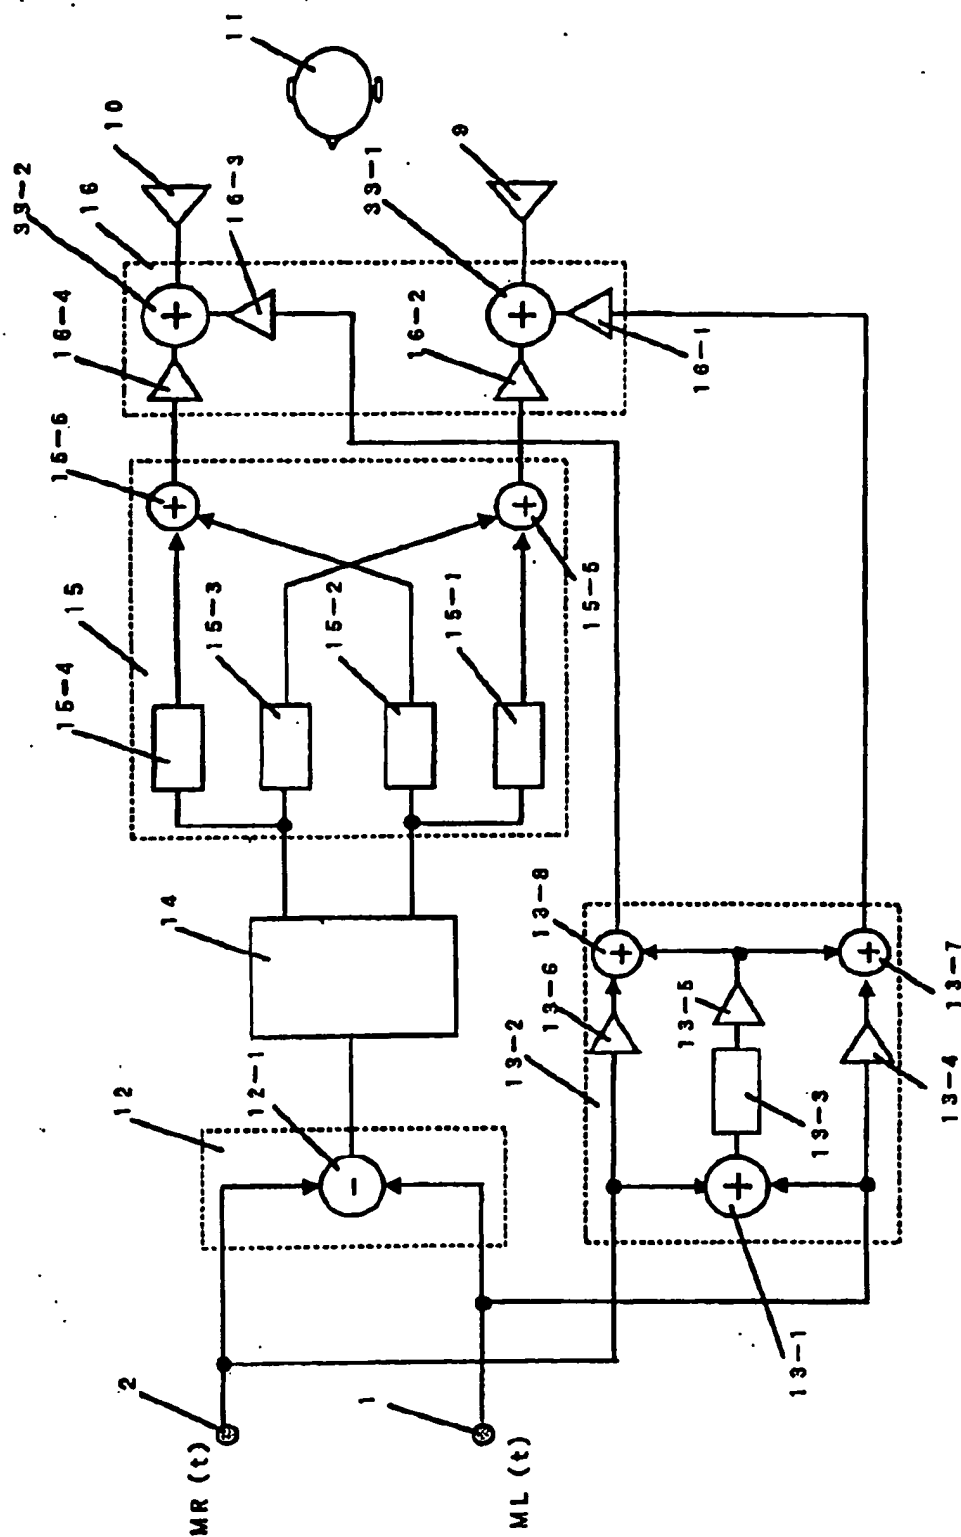


[Drawing 7]

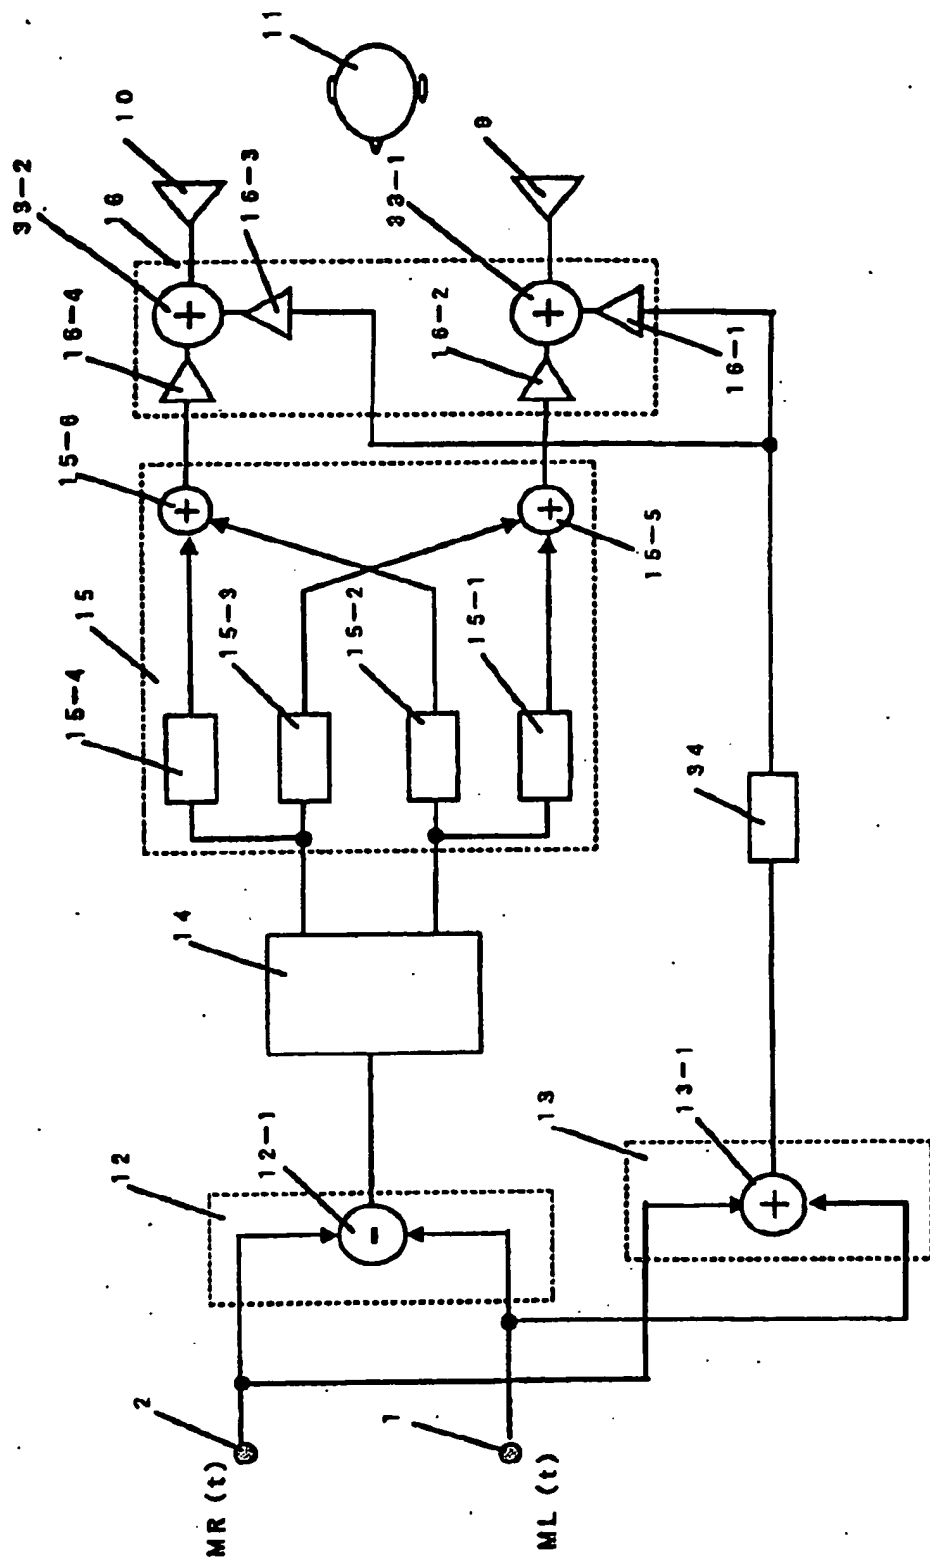


[Drawing 8]

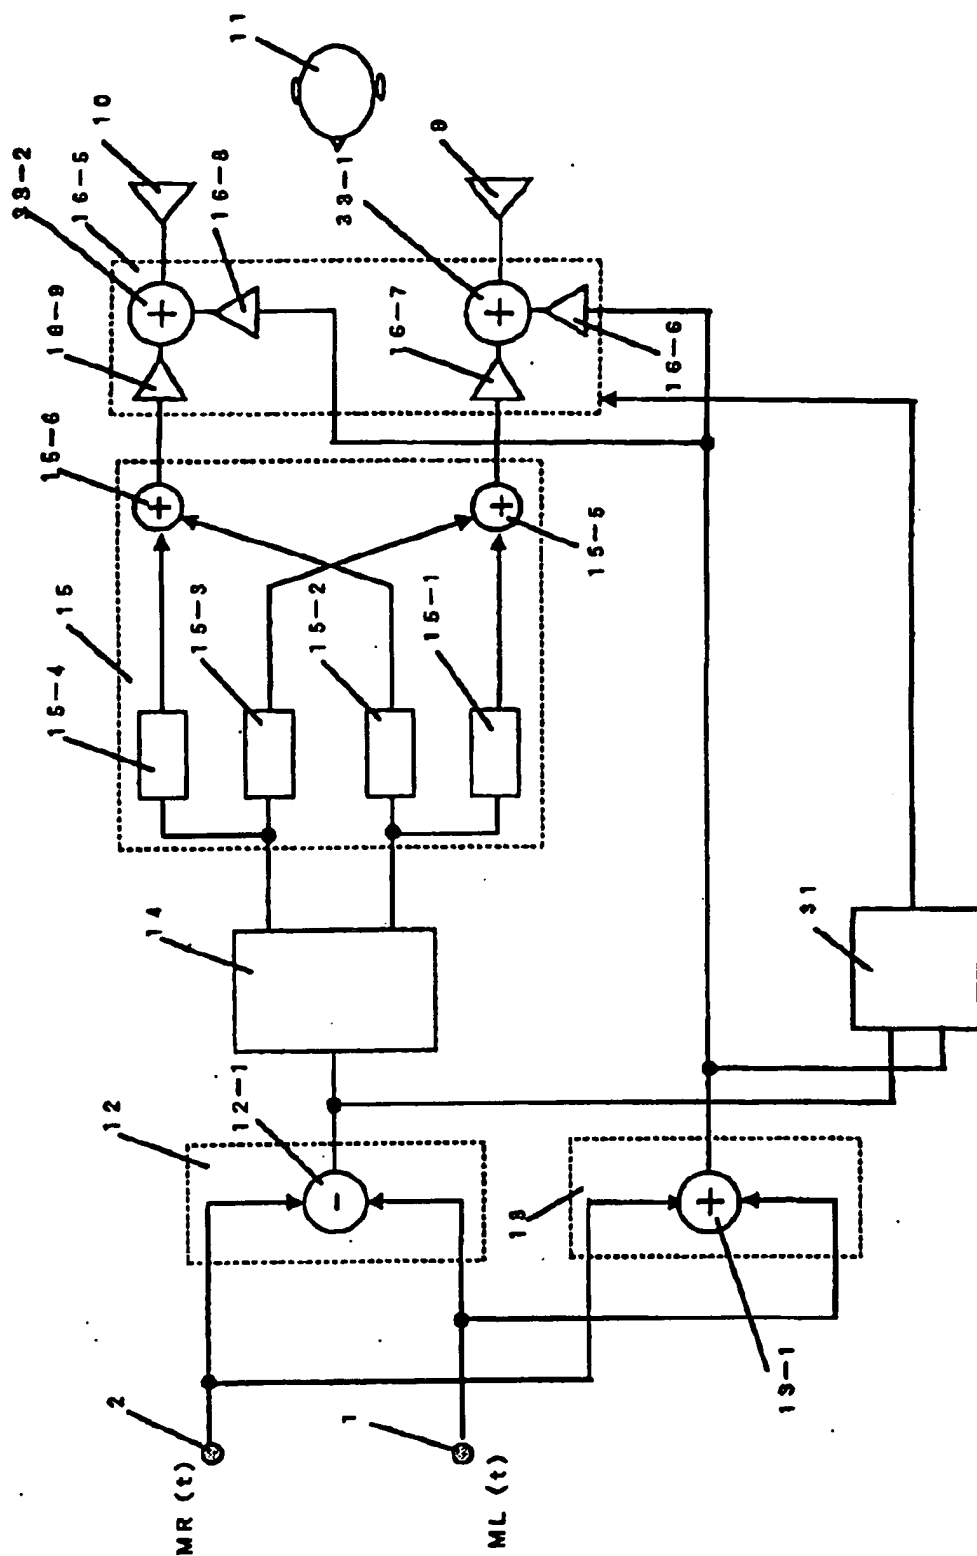

[Drawing 9]

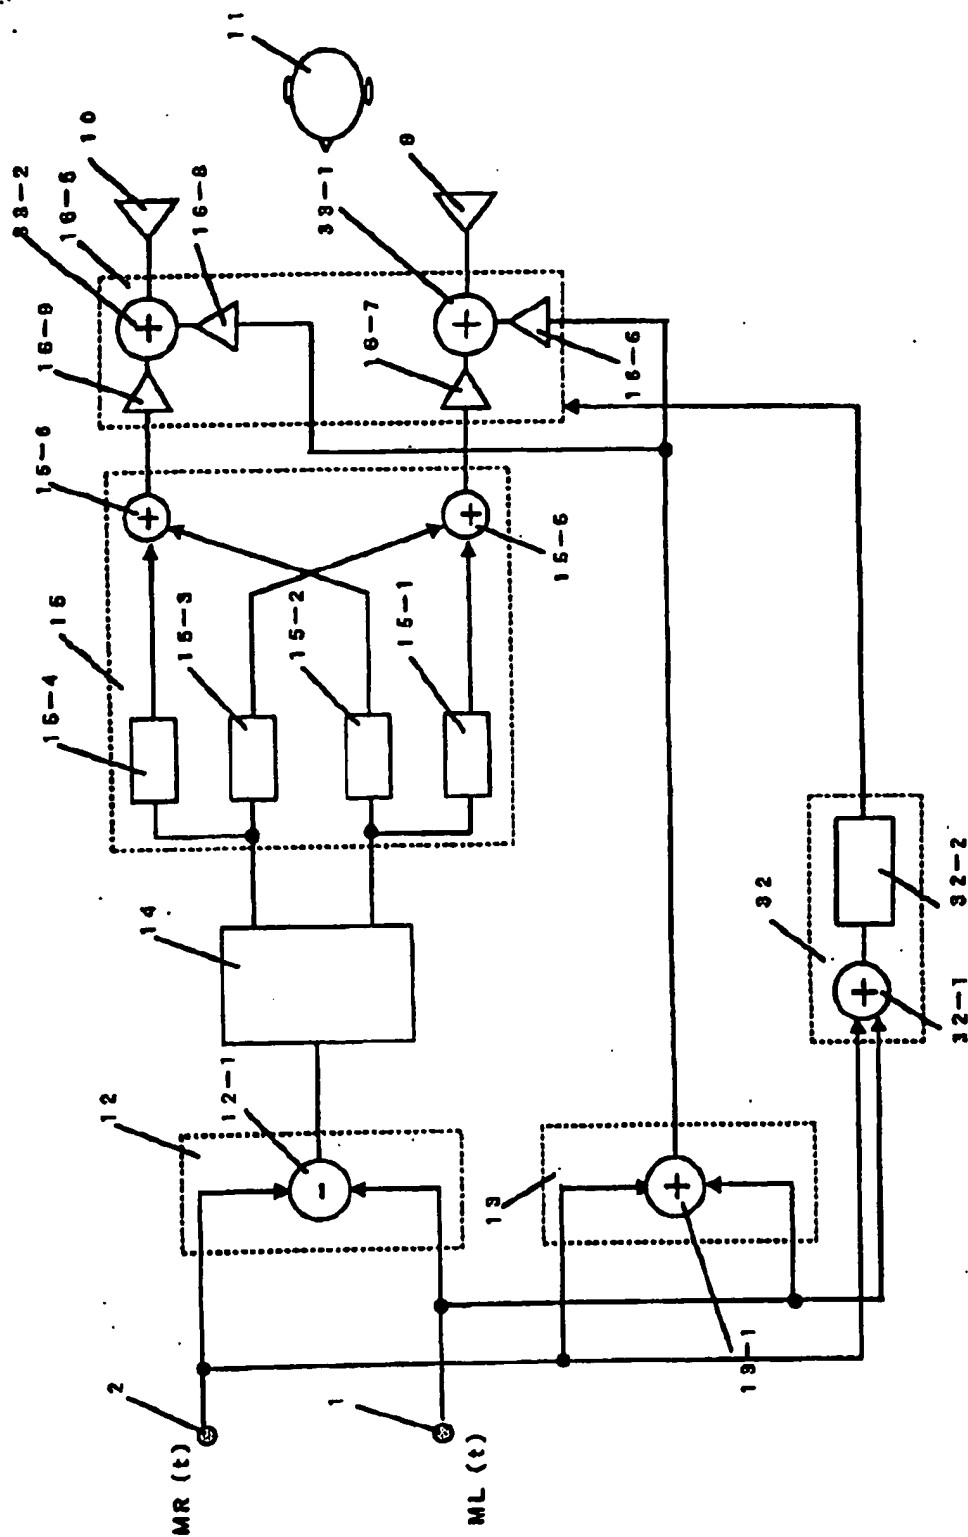


[Drawing 10]

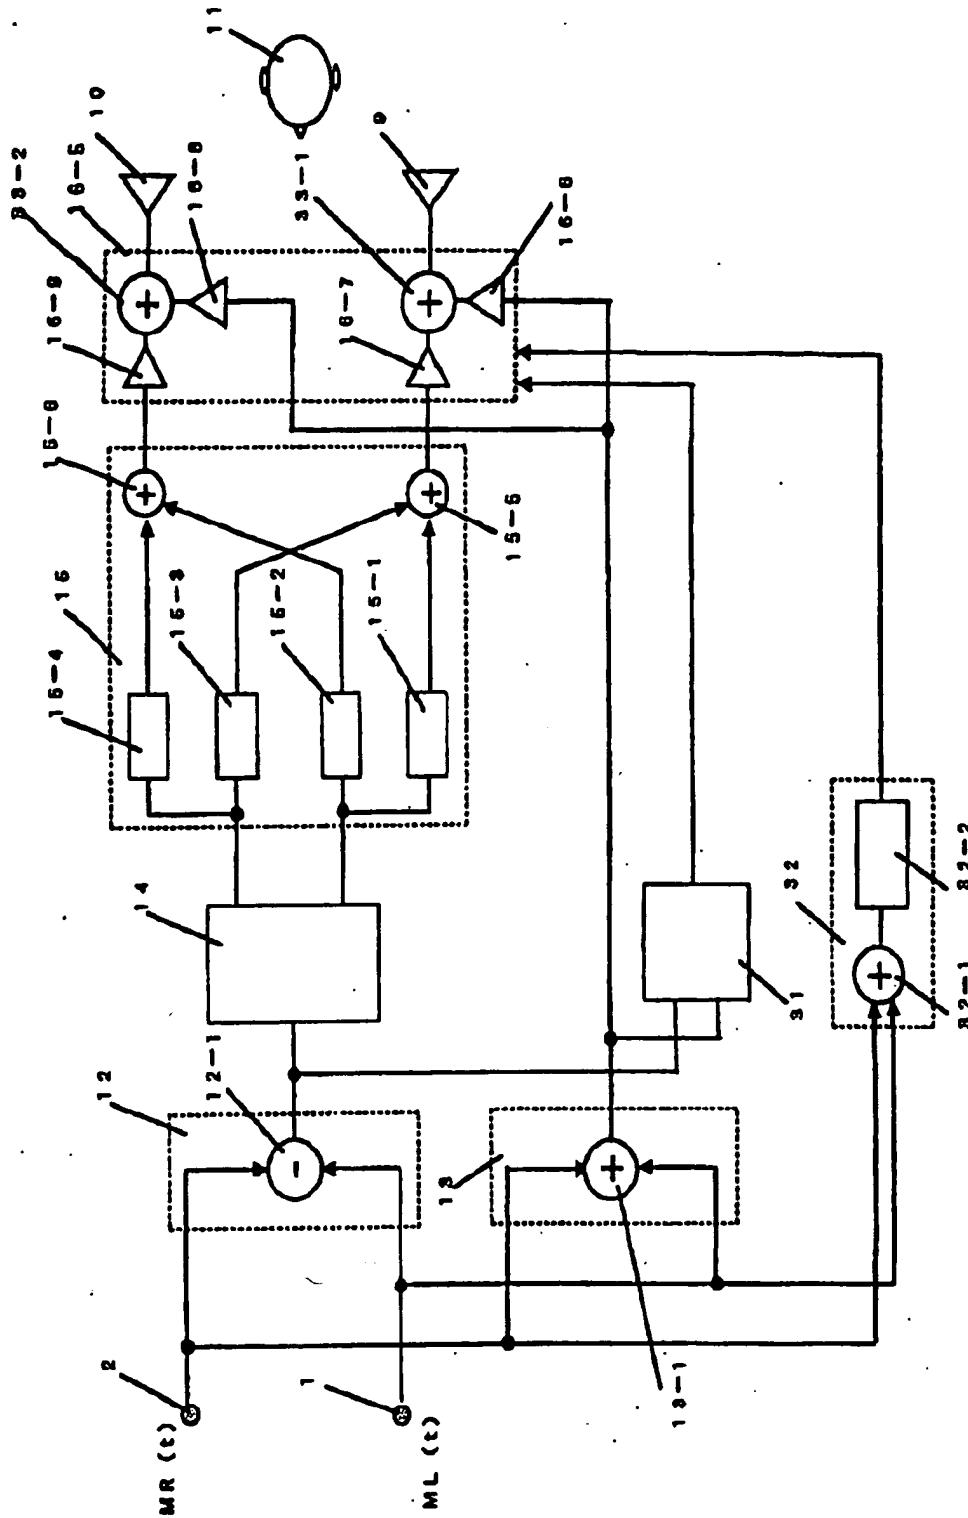


[Drawing 11]




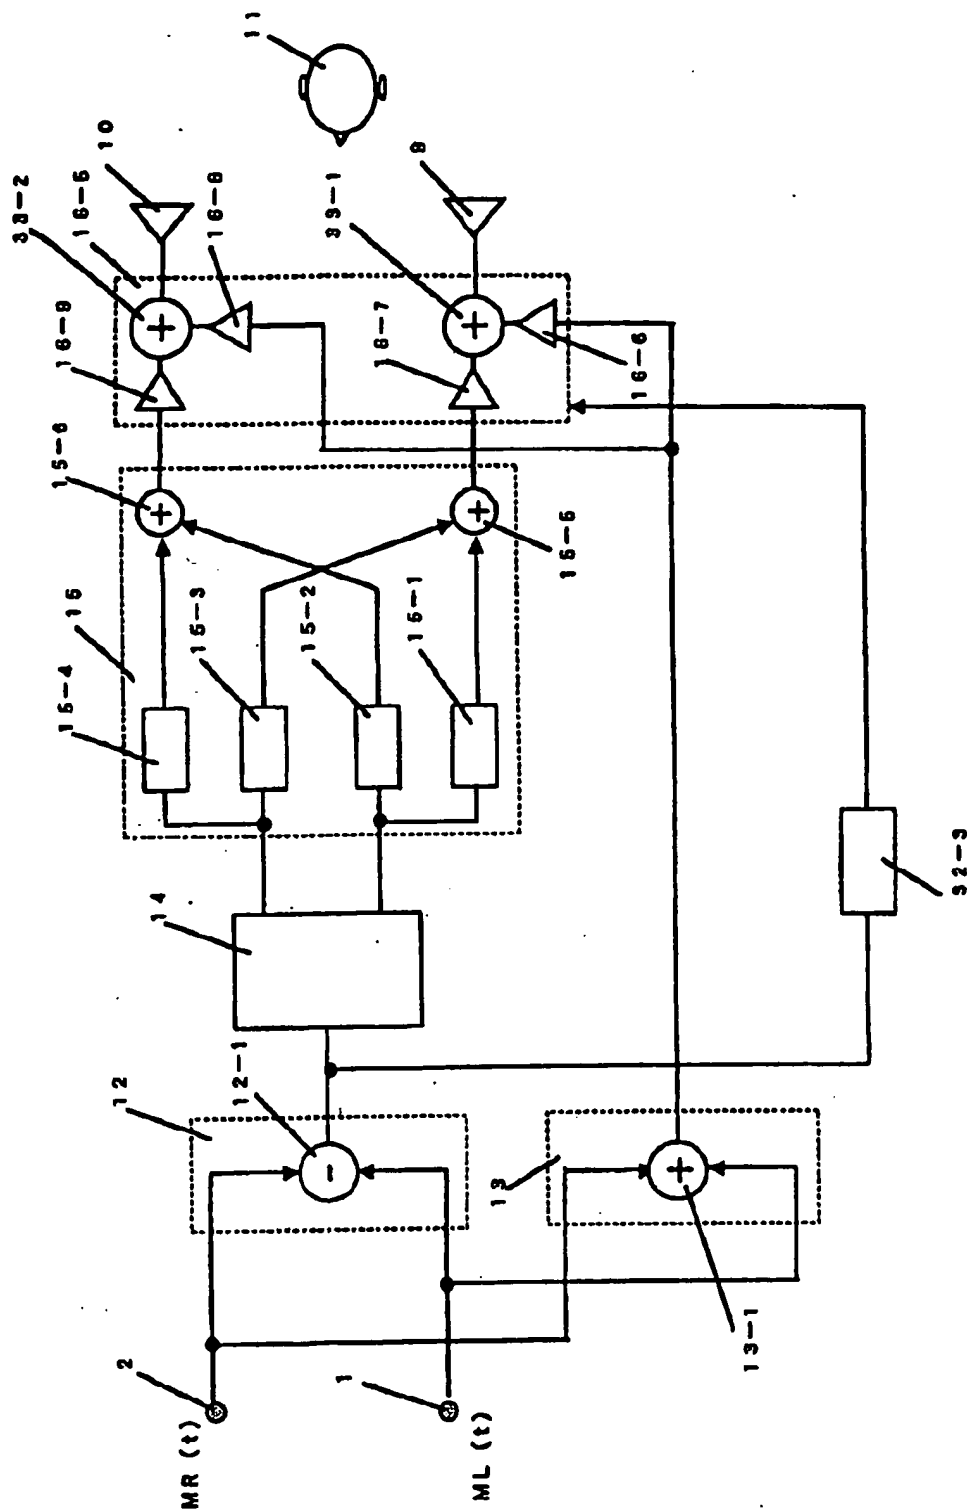

[Drawing 12]

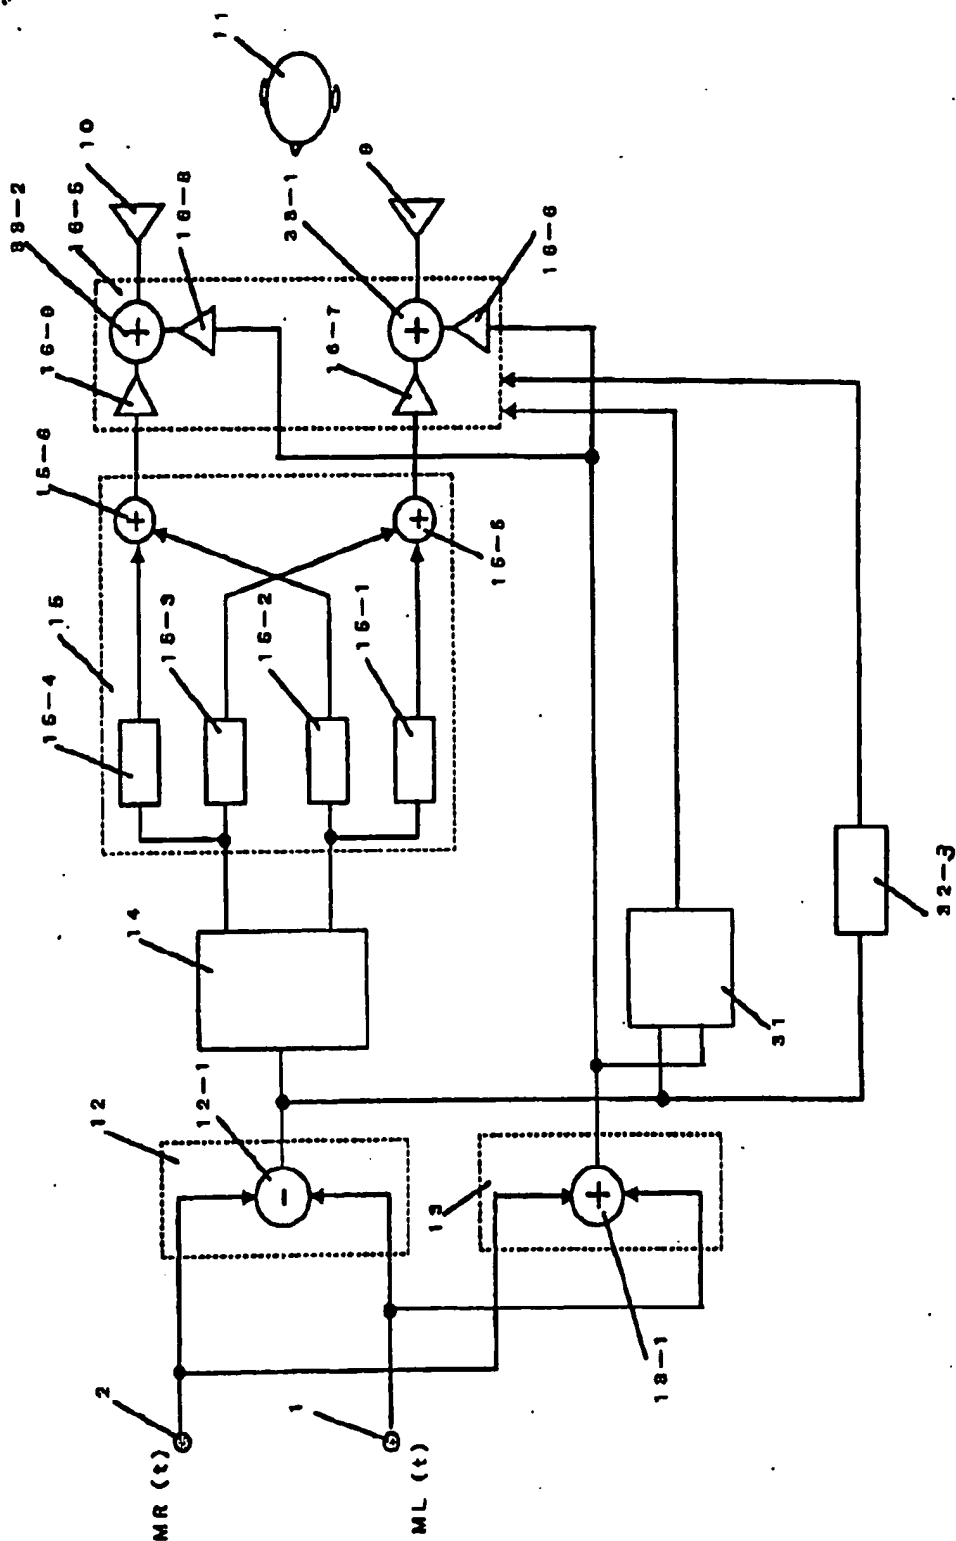

[Drawing 13]

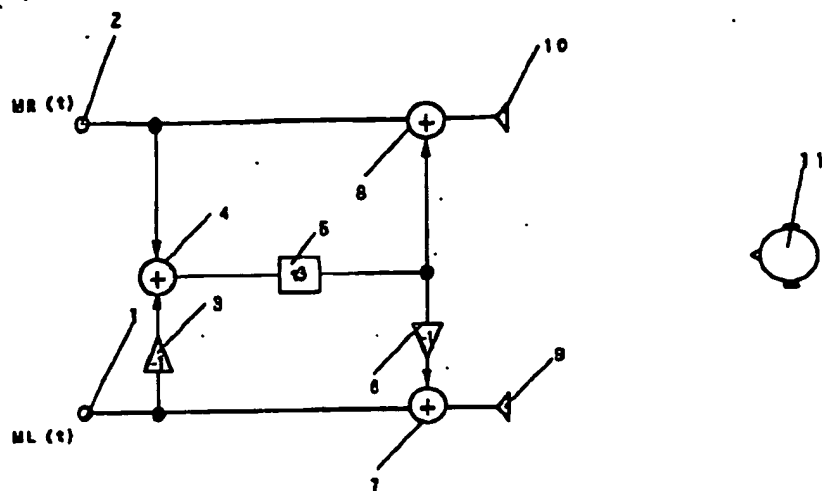

[Translation done.]

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**